

SPECIFICATION SHEET – (SDRO-11)

M D Marshall & Co (Nottm) Ltd
Office 1 Jarodale House
7 Gregory Boulevard
Nottingham
NG7 6LB



T: 0845 6580424
F: 0115 9857557
E: info@mdmsecuritydoors.co.uk
W: mdmsecuritydoors.co.uk

STANDARD SPECIFICATION – STEEL-TEC DOUBLE LEAF SECURITY DOOR (OUTWARD OPENING/RIGHT HAND ACTIVE LEAF)

Door Leaf:

- Manufactured from 1.2mm zintec steel
- Folded 45mm thick leaf with composite Dufaylite honeycomb core
- Integral anti-jemmy strip to defend against lever attack

Door Frame:

- Manufactured from 1.6mm zintec steel
- Single rebate 90mm wide profile
- Easy fit frame as standard – includes 10 adjusters
- Internal hinge chassis system for extra strength
- Prepared for inside and outside fixing
- Peripheral self adhesive rubber seals (for on site fitting)

Locking & hardware/furniture:

- Union sashlock with levers (inside & out) and double euro cylinder to active leaf. Flush bolts to edge of passive leaf

Threshold:

- Disability Discrimination Act (DDA) compliant aluminium threshold

Security Door Hinges:

- Minimum of 4no high quality stainless steel hinges (BS 1935.2002 grade 13) – (larger doors have 6 hinges)

Security Door Dog Bolts:

- Minimum of 7no 17.5mm solid steel dog bolts (9 on larger doors)

Finishes:

- Choice of unfinished zintec, primer or powder coating in a wide range of standard colours. Non standard shades & 'Extra Life' paint at extra cost


Average weight:

- Estimated 35kg per sq metre (based on 1.2mm door leaf)


Options Include:

- Manual locks - deadlocks, night latches, emergency escape sashlocks, 5 lever sash & deadlocks, rim locks, codelocks, keypad locks, multipoint locks, surface mounted bolts
- Electric locks – electric strikes with night latches, magnetic locks, solenoid bolts, push to exit buttons
- Cylinders – single & double oval & euro profile, single & double oval & euro profile cylinders with thumbturns
- Handles – stainless steel levers, bolt through pull handles, surface mounted pull handles, mushroom knobs, DDA pull handles
- Alternative frames & thresholds – 150mm wide profile frames, low & extra low profile thresholds, inward opening door thresholds
- Alternative leaf & frame thicknesses – 1.6 mm leaf with 1.6mm frame, 2mm leaf with 2mm frame
- Alternative hinges – full length piano hinges, lift-off hinges
- Alternative leaf infill – rockwool, part plywood & box section
- Fixed top panels – solid or glazed panels
- Glazing – vision panels with Georgian wired, polycarbonate or laminate glazing in configurations to suit requirements
- Louvres – various louvred panels in configurations to suit requirements
- Accessories – letter plates, closers, limit stays, rain deflectors, brush strip, push plates, kick plates, spy viewers, finger protection strips, drop bars, shoot bolts, hasp & staples, mushroom knobs

SPECIFICATION SHEET – (SDRO-11)

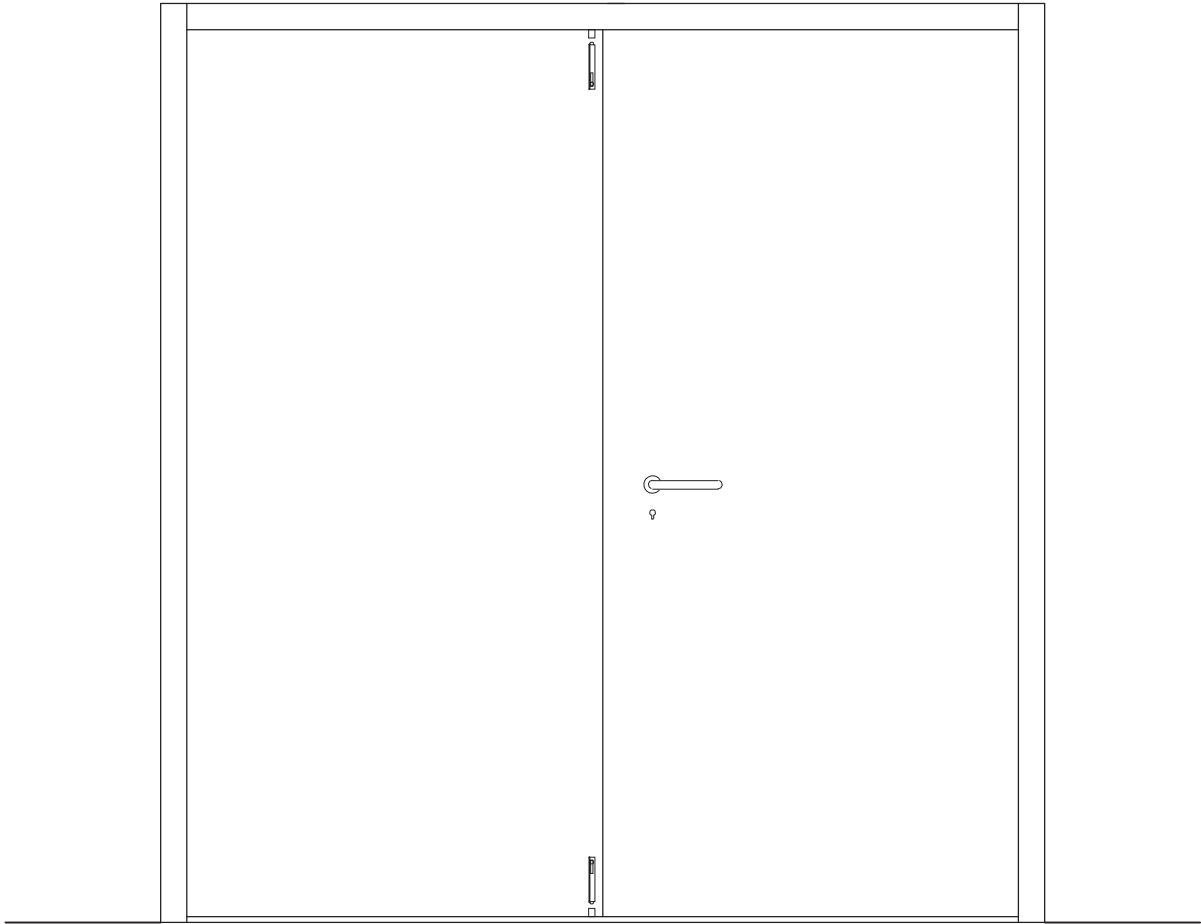

INSIDE

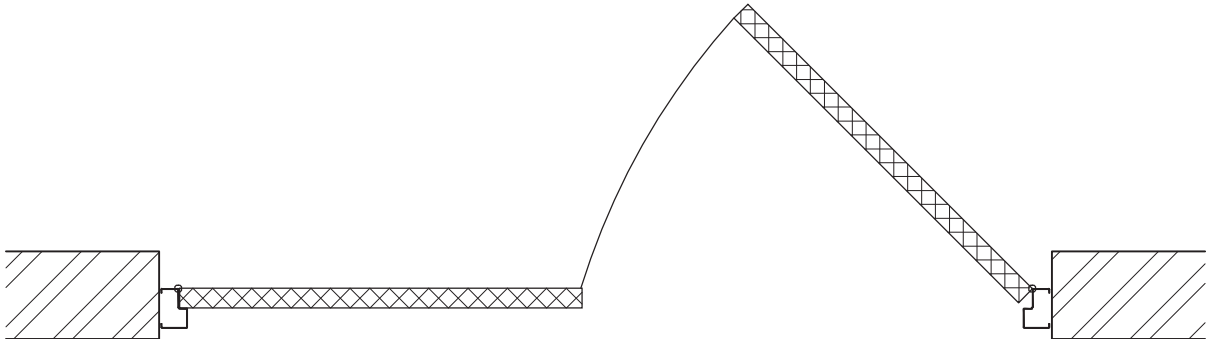

STEEL-TEC DOUBLE LEAF
OUTWARD OPENING - RIGHT HAND ACTIVE